AT1316 Whole Body Counter



AT1316 Whole body counter (WBC) is designed for express-monitoring and measuring of gamma-emitting radionuclides in human body, as well as for internal exposure dose estimation ("Sitting straight" geometry).

Operating principle

WBC operating principle is based on detection of incorporated radionuclide activity with spectrometric detection unit and processing of spectrometer measurement information with hardware-software instruments to define radiometric characteristic of internal contamination considering anthropometric characteristic of target person.



Whole body counter calibration using human body phantom



Measurement of a Person

Applications

Citizens and staff individual dosimetric monitoring of internal exposure:

- Citizens and staff monitoring during and after radiation accidents
- Factory and office workers monitoring, involved into radioactive material production or use

Features

- Stabilized spectrometric path
- Spectrometric and radiometric measurement modes
- Efficient algorithm of spectra radiometric processing for ¹³⁷Cs and ¹³⁴Cs radionuclides activity measurement
- Calculation of expected annual effective internal exposure dose for incorporated
 ¹³⁷Cs and ¹³⁴Cs radionuclides
- Radionuclide identification in spectrometric mode
- Flexible software control of spectrometer functions, generation of database and report based on measurement results
- Fixed chair geometry
- Compact design
- Prompt accommodation to background conditions using operational background generating option
- Can be installed into a van as part of mobile radiation monitoring laboratory
- USB Counter-to-PC connection






AT1316 Whole Body Counter

Specification

Detector type	Scintillator, NaI(TI) Ø150x100 mm
Registered gamma radiation energy range	50 keV3 MeV
Minimum measured activity of ¹³⁷ Cs and ¹³⁴ Cs in adult human body for 3 min. measurement interval	300 Bq
Radionuclides activity measurement range in human body 137Cs 134Cs	807.5·10⁵ Bq 604·10⁵ Bq
Measurement geometry	"Sitting straight"
Intrinsic relative error of ¹³⁷ Cs activity measurement in phantom	±15%
Number of ADC channels	1024
Integral nonlinearity	±1% max.
Typical resolution at 662 keV (¹³⁷ Cs)	9%
Measurement instability during continuous service	±3% max.
Express-monitoring productivity	15 person/h
Operation mode setup time	10 min
Continuous run time	24 h
Working temperature range	10°C35°C
Relative air humidity with air temperature ≤30°C without condensation	≤75%
Power supply	230 VAC, 50 Hz
Power consumption	≤200 VA
Weight	250 kg

Measurement result display

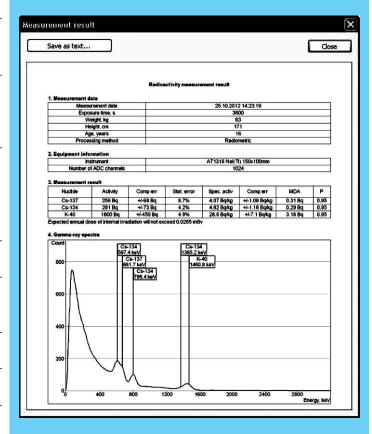

AT1316 Whole Body Counter meets

International standard requirements:

IEC 61582:2004

IEC 60601-1:2005

EN 50371:2002

Safety standard requirements:

IEC 61010-1:1990

EMC requirements:

EN 55022:1998+A1:2000+A2:2003

EN 55024:1998+A1:2001+A2:2003

IEC 61000-4-2-2001

AT1316 Whole Body Counter has the pattern approval certificates of Republic of Belarus, Russian Federation, Ukraine and Kazakhstan.

Design and specifications are subject to change without notice









